



PARALLEL PARKING

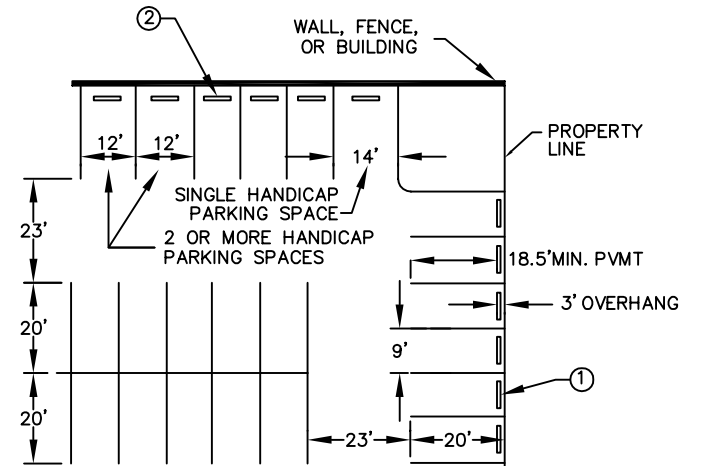

90° PARKING

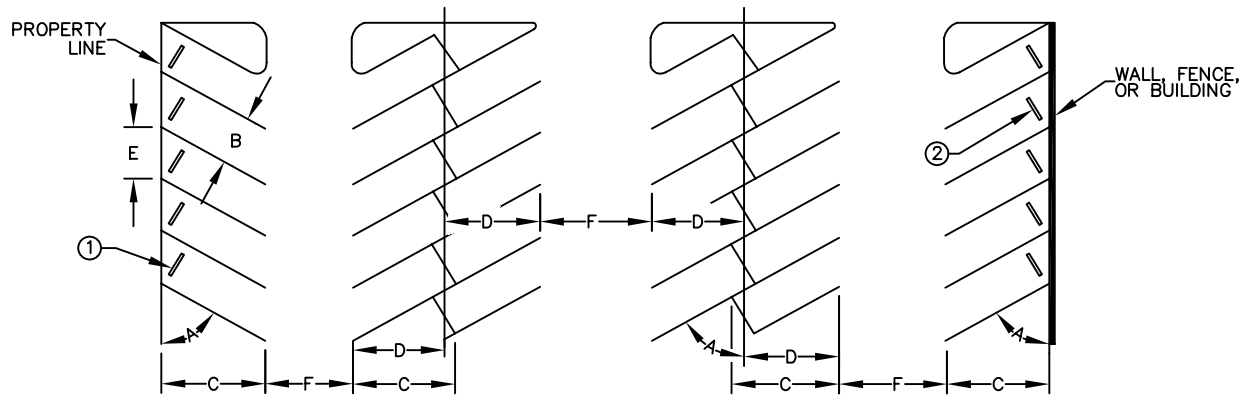

ANGLE PARKING

NOTES:

- WHERE NO WALL OR BUILDING EXISTS, A 6" HIGH CURB OR BUMPER GUARD IS REQUIRED SO THAT NO PART OF THE VEHICLE EXTENDS OVER OR BEYOND THE PROPERTY LINE. A 6" X 18" CONCRETE CURB IS REQUIRED BETWEEN AREAS OF VEHICULAR ACTIVITY AND PUBLIC RIGHT-OF-WAY, I.E., STREETS AND ALLEYS.
- WHERE PARKING ABUTS A PERIMETER WALL/FENCE OR BUILDING, A 6" BUMPER GUARD IS RECOMMENDED TO PREVENT VEHICLE OR STRUCTURE DAMAGE.

PARKING ANGLE	STALL WIDTH	STALL	DEPTH	CURB LENGTH	DRIVEWAY WIDTH	
					1-WAY	2-WAY
30°	9'	19.25'	15'	20'	11'	23'
45°	9'	21.5'	18'	14.2'	13'	23'
60°	9'	22.5'	20'	11.5'	18'	23'

*20' (MIN.) WIDTH WHERE FIRE DEPT. ACCESS IS REQUIRED.